

EEEEASILY MORE.

Excellent. Efficient. Expert.

The value-added modules of the IBC SOLAR Line. IBC PolySol 260 GX, 265 GX, 270 GX

First-class solar modules made of polycrystalline silicon



25 year linear power and 15 year product warranty¹



Positive power tolerance (-0/+5 Wp)



Increased mechanical stability (5400 Pa)²



German warrantor



100% tested quality



Maximum transparent ARC glass

IBC SOLAR – a strong global partner for solar power

IBC SOLAR AG has been successful for more than **30 years** and is amongst the leading international energy companies, which provide high-performance system solutions in every size and for every application with intelligent photovoltaic systems. The **economic strength and financial independence** is confirmed by globally recognised rating agencies.

Smart Systems for Solar Power thanks to perfectly matched components. **More than 1,000 highly qualified partners** around the world, as well as **more than 2,700 megawatts of installed power** and over **160,000 photovoltaic systems** all underline the high level of expertise of IBC SOLAR.

Convince yourself of the energy solutions by IBC SOLAR!

WEEE-Reg. Nr. for Germany: DE 55734541



Made in
GERMANY

The ideal solution for:



TECHNICAL DATA

IBC PolySol	260 GX	265 GX	270 GX
Article number	2204400010	2204400008	2204400009

Electrical data (STC):			
STC Power Pmax (Wp)	260	265	270
STC Nominal Voltage Umpp (V)	31.1	31.4	31.6
STC Nominal Current Imp (A)	8.37	8.44	8.56
STC Open Circuit Voltage Uoc (V)	38.1	38.6	38.8
STC Short Circuit Current Isc (A)	8.98	9.03	9.18
Module Efficiency (%)	15.9	16.2	16.5
Power Tolerance (Wp)	-0/+5	-0/+5	-0/+5

Electrical data (NOCT):			
800 W/m ² NOCT AM 1.5 Power Pmax (Wp)	193.9	197.6	201.4
800 W/m ² NOCT AM 1.5 Nominal Voltage Umpp (V)	28.16	28.39	28.61
800 W/m ² NOCT AM 1.5 Open Circuit Voltage Uoc (V)	34.47	34.72	34.96
800 W/m ² NOCT AM 1.5 Short Circuit Current Isc (A)	7.25	7.32	7.39
Relative Efficiency Reduction at 200 W/m ² (%)	2.50	2.50	2.50

Temperature coefficient:			
NOCT (°C)	46	46	46
Tempcoeff Isc (%/°C)	+0.044	+0.044	+0.044
Tempcoeff Voc (mV/°C)	-121.92	-123.52	-124.16
Tempcoeff Pmpp (%/°C)	-0.42	-0.42	-0.42


Operating conditions:	
Max. System Voltage (V)	1000
Application Class	A
Reverse Current Ir (A)	20
Current value string fuse (A)	15
Fuse protection from parallel strings	3

Mechanical properties:	
Dimensions (L × W × H in mm)	1654 × 989 × 40
Weight (kg)	18.2
Load capacity (Pa) ²	5400
Front sheet (mm)	3.2 (low-iron photovoltaic glass and anti-reflective coating)
Frame	anodized aluminium
Cells	6 × 10 polycrystalline silicon cells
Connection type	MC4 (IP65)

Warranties and certification:	
Product warranty	15 years ¹
Power warranty	25 years, linear ¹
Certification	IEC 61215, IEC 61730-1/-2, ISO 9001, ISO 14001, OHSAS 18001


Packaging information:	
Number of modules per pallet	35
Number of pallets per 40' container	14
Number of pallets per lorry	15
Dimensions incl. pallet (L × W × H in mm)	1705 × 1030 × 1960
Gross weight incl. pallet (kg)	680
Stackability per pallet	1-fold

25 year linear power warranty by IBC SOLAR

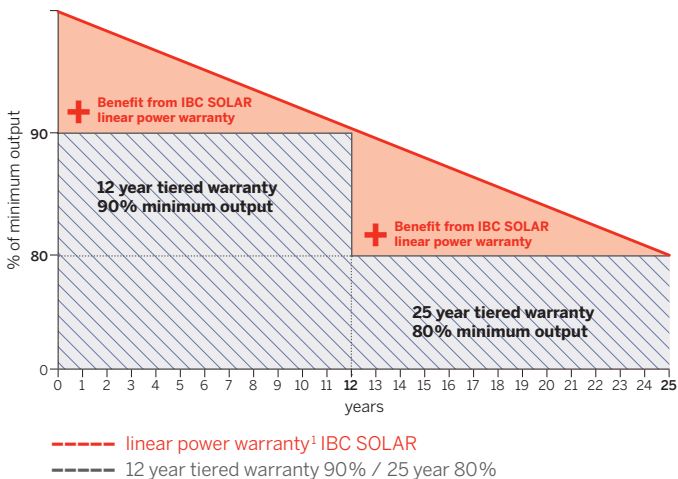

¹) The linear power and product warranty are only valid for installations within Europe and Japan. The warranty requires installation according to the valid installation instructions. Standard test conditions: 1000 W/m² irradiation with a spectral distribution of AM1.5 and a cell temperature of 25°C. 800 W/m², NOCT. Information according to EN 60904-3 (STC). All values according to DIN EN 50380. Errors and changes reserved.
 The precise conditions and content can be taken from the respectively valid version of the product and power warranty, which you can obtain from your IBC Premium Partner.

²) Tested according to IEC 61215 for snow loads up to 5,400 Pa (5.4 kN/m²).

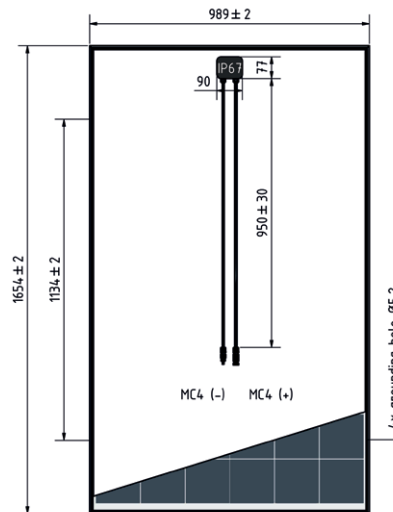

Presented by: